


# SELFLOK

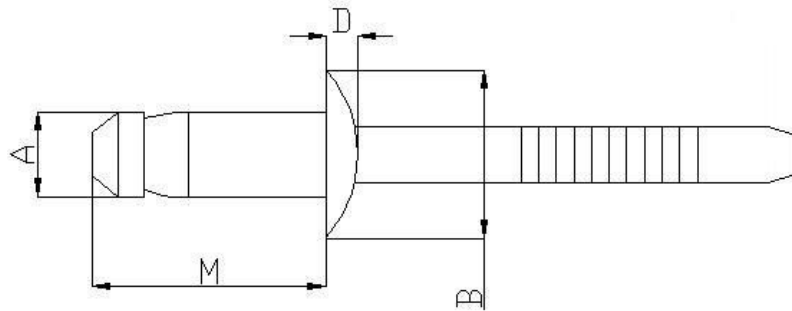


Type	Material		Finish
	Rivet	Mandrel	
Steel	D8-2/SAE 1008	35B2/SAE 1035B	Clear Zinc & Chromate

Self-Fix	Textron 2221	A nom.	Hole Size	Grip Range	B max.	D max.	M max.
SL-0812	0812	6.4	6.7-6.9	1.5-3.5	13.4	3.0	13.7
SL-0813	0813	6.4	6.7-6.9	2.8-4.8	13.4	3.0	15.0
SL-0814	0814	6.4	6.7-6.9	3.4-5.3	13.4	3.0	15.6
SL-0815	0815	6.4	6.7-6.9	4.8-6.8	13.4	3.0	17.0
SL-0817	0817	6.4	6.7-6.9	6.8-8.8	13.4	3.0	19.0
SL-0818	0818	6.4	6.7-6.9	7.5-9.5	13.4	3.0	19.7
SL-0819	0819	6.4	6.7-6.9	8.8-10.8	13.4	3.0	21.0
SL-0821	0821	6.4	6.7-6.9	10.8-12.8	13.4	3.0	23.0

## Typical Mechanical Strengths

Part No.	Shear (kN)	Tensile (N)
SL-0812	10.0	7500
SL-0813	11.5	7500
SL-0814	12.0	7500
SL-0815	12.0	7500
SL-0817	13.5	7500
SL-0818	14.5	7500
SL-0819	15.5	7500
SL-0821	15.5	7500



May 2009

VISIT OUR WEB-SITE: [www.self-fix-metals.com](http://www.self-fix-metals.com)